

02-28-00

A

UTILITY PATENT APPLICATION TRANSMITTAL

Submit an original and a duplicate for fee processing
(Only for new nonprovisional applications under 37 CFR §1.53(b))

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Attorney Docket No. 200410
First Named Inventor Paramvir BAHL
Express Mail No. EL305737263US

APPLICATION ELEMENTS

1. ☒ Utility Transmittal Form
2. ☒ Specification (including claims and abstract) [Total Pages 38]
3. ☒ Drawings [Total Sheets 6]
4. ☒ Combined Declaration and Power of Attorney [Total Pages 3]
 - a. ☐ Newly executed
 - b. ☐ Copy from prior application
[Note Box 5 below]
 - i. ☐ Deletion of Inventor(s) Signed statement attached deleting inventor(s) named in the prior application
5. ☐ Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy
 - c. ☐ Statement verifying above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet and document(s))
9. ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)
 - ☐ Form PTO-1449
 - ☐ Copies of References
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (Should be specifically itemized)
14. ☐ Small Entity Statement(s)
 - ☐ Enclosed
 - ☐ Statement filed in prior application; status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
16. ☐ Other:

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information in (a) and (b) below:
- (a) ☐ Continuation ☐ Divisional ☐ Continuation-in-part of prior application Serial No. _____
Prior application information: Examiner _____; Group Art Unit: _____
- (b) Preliminary Amendment: Relate Back - 35 USC §120. The Commissioner is requested to amend the specification by inserting the following sentence before the first line:
"This is a ☐ continuation ☐ divisional of copending application(s)
☐ Serial No. _____, filed on _____
☐ International Application, filed on _____, and which designates the U.S."

APPLICATION FEES

BASIC FEE				\$690.00
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total Claims	44	-20=	24	x \$18.00 \$432.00
Independent Claims	2	- 3=	0	x \$78.00 \$0.00
<input type="checkbox"/> Multiple Dependent Claims(s) if applicable				+ \$260.00 \$
Total of above calculations =				\$1,122.00
Reduction by 50% for filing by small entity =				\$()
<input checked="" type="checkbox"/> Assignment fee if applicable				+ \$40.00 \$40.00
TOTAL =				\$1,162.00


UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 200410

19. ☐ Please charge my Deposit Account No. 12-1216 in the amount of \$.
20. ☒ A check in the amount of \$1,162.00 is enclosed.
21. The Commissioner is hereby authorized to credit overpayments or charge any additional fees of the following types to Deposit Account No. 12-1216:
- a. ☒ Fees required under 37 CFR §1.16.
- b. ☒ Fees required under 37 CFR §1.17.
22. ☒ The Commissioner is hereby generally authorized under 37 CFR §1.136(a)(3) to treat any future reply in this or any related application filed pursuant to 37 CFR §1.53 requiring an extension of time as incorporating a request therefor, and the Commissioner is hereby specifically authorized to charge Deposit Account No. 12-1216 for any fee that may be due in connection with such a request for an extension of time.

23. CORRESPONDENCE ADDRESS

Vladan M. Vasiljevic, Registration No. 45,177
Leydig, Voit & Mayer, Ltd.
Two Prudential Plaza, Suite 4900
180 North Stetson
Chicago, Illinois 60601-6780
Telephone: (312) 616-5600
Facsimile: (312) 616-5700

Name	Vladan M. Vasiljevic
Signature	
Date	February 25, 2000

Certificate of Mailing Under 37 CFR §1.10

I hereby certify that this Utility Patent Application Transmittal and all accompanying documents are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" Service under 37 CFR §1.10 on the date indicated below and is addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

		February 25, 2000
Name of Person Signing	Signature	Date

Attorney Docket No.

200410

PATENT APPLICATION

Invention Title:

**USING A DERIVED TABLE OF SIGNAL STRENGTH DATA TO LOCATE AND
TRACK A USER IN A WIRELESS NETWORK**

Inventors:

Paramvir BAHL	U.S.A.	Issaquah	Washington
INVENTOR'S NAME	CITIZENSHIP	CITY OF RESIDENCE	STATE or FOREIGN COUNTRY

Venkata N. PADMANABHAN	India	Bellevue	Washington
INVENTOR'S NAME	CITIZENSHIP	CITY OF RESIDENCE	STATE or FOREIGN COUNTRY

Be it known that the inventors listed above have invented a certain new and useful invention
with the title shown above of which the following is a specification.

USING A DERIVED TABLE OF SIGNAL STRENGTH DATA TO LOCATE AND TRACK A USER IN A WIRELESS NETWORK

TECHNICAL FIELD

5 This invention relates generally to determining the location of an object and tracking the object and, more particularly, relates to locating and tracking a user of a wireless network.

BACKGROUND OF THE INVENTION

10 Advances in the Global Positioning System (GPS) have provided non-military users an inexpensive and portable location and tracking device. Currently the GPS system is used to provide directions to drivers through an in-vehicle system, provide location and tracking information for marine navigation, and allow shipping companies to locate and track individual shipments. However, the GPS system is severely limited in an
15 indoor environment.

 The GPS system relies on the timing of signals from GPS satellites received by individual GPS units on the ground. Thus, an unobstructed view to the satellites is necessary to receive the signal. In an indoor environment, such an unobstructed view is, in general, not possible to obtain. Furthermore, the principal objective in developing GPS
20 was to offer the United States military accurate estimates of position, velocity and time. Civil users of GPS were to be provided only "reasonable" accuracy consistent with national security concerns. As a result, satellite signals are purposefully degraded under a government policy called Selective Availability and consequently the resolution provided by the system is no more than 100 meter for civilian users. This coarse resolution is

inadequate for many applications and compounds the problem of the ineffectiveness of GPS indoors.

Because of these limitations, other technologies have been developed to locate and track users or objects in an in-building environment. One such system uses tags placed on the items that are to be tracked. The tags can be either active or passive. An active tag contains power circuitry, which can communicate with base stations. A passive tag contains no internal power, rather it is charged either inductively or electromagnetically as it passes within the range of a base station. Using this derived power, the passive tag communicates with the station. The base stations are physically linked together through a wired or wireless network. Each tag transmits a code uniquely identifying itself. Thus, the location of the tag is determined to be in the vicinity of the base station with which the tag last communicated.

Such tag-based tracking and location systems, while being useful in an in-building environment, require a significant installation of specialized base stations. A tag-based system can only determine the location of the tags as being “near” a particular base station, consequently, to achieve a sufficiently high resolution a large number of base stations must be installed. Obtrusive tags have to be placed on every item that is to be tracked or located, and in the case of infra-red tags, the system operates only when there is a “line-of-sight” between the tag and a base station. For all these reasons location-determination technology based on tags has had very limited success.

SUMMARY OF THE INVENTION

Therefore, the present invention is generally directed to a system for locating and tracking a user in a building without a specialized infrastructure and with the ability to track without a line-of-sight between the user and a base station.

5 The present invention is also generally directed to a system for locating and tracking a user in a building using the existing Radio-Frequency (RF) Wireless Local Area Network (WLAN) infrastructure.

A Wireless Local Area Network (WLAN) consists of base stations connected to a wired network, and mobile devices which are “connected” to the WLAN through wireless
10 communication with the base stations. The present invention uses the signal sensing ability of both the base station and the mobile device to determine the location of the mobile device, and thus the location of the user of the mobile device. The strength of the received signal from several base stations is measured by the mobile device. The mobile device then compares the signal strength from each of the base stations to a pre-computed
15 table containing the base stations’ signal strength at various known locations of the mobile device. From this comparison, the mobile device determines its location.

Alternatively, the signal strength from the mobile device can be measured at a number of base stations. This signal strength is then compared by a central computer to a pre-computed table containing the mobile computer’s signal strength at the base stations for
20 various known locations of the mobile computer. From this table, the central computer determines the location of the mobile computer.

Additional features and advantages of the invention will be made apparent from the following detailed description of illustrative embodiments which proceeds with reference to the accompanying figures.

5

BRIEF DESCRIPTION OF THE DRAWINGS

While the appended claims set forth the features of the present invention with particularity, the invention, together with its objects and advantages, may be best understood from the following detailed description taken in conjunction with the accompanying drawings of which:

10 Figure 1 is a block diagram generally illustrating an exemplary computer system on which the present invention resides;

 Figure 2 is a diagram generally illustrating a wireless network according to the present invention;

15 Figure 3 is a diagram generally illustrating a wireless network on one floor of an office building;

 Figure 4 is a diagram generally illustrating the locations of empirical determinations of signal strength according to the present invention;

 Figure 5 is a diagram generally illustrating the operation of a line-clipping algorithm; and

20 Figure 6 is a flow chart generally illustrating the operation of a mathematical derivation of a signal strength table according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Turning to the drawings, wherein like reference numerals refer to like elements, the invention is illustrated as being implemented in a suitable computing environment. Although not required, the invention will be described in the general context of computer-executable instructions, such as program modules, being executed by a personal
5 computer. Generally, program modules include routines, programs, objects, components, data structures, etc. that perform particular tasks or implement particular abstract data types. Moreover, those skilled in the art will appreciate that the invention may be practiced with other computer system configurations, including hand-held devices, multi-processor systems, microprocessor based or programmable consumer electronics, network
10 PCs, minicomputers, mainframe computers, and the like. The invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

15 With reference to Figure 1, an exemplary system for implementing the invention includes a general purpose computing device in the form of a conventional mobile personal computer 20, including a processing unit 21, a system memory 22, and a system bus 23 that couples various system components including the system memory to the processing unit 21. The system bus 23 may be any of several types of bus structures
20 including a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. The system memory includes read only memory (ROM) 24 and random access memory (RAM) 25. A basic input/output system (BIOS) 26, containing the basic routines that help to transfer information between elements within

the mobile personal computer 20, such as during start-up, is stored in ROM 24. The mobile personal computer 20 further includes a hard disk drive 27 for reading from and writing to a hard disk 60, a magnetic disk drive 28 for reading from or writing to a removable magnetic disk 29, and an optical disk drive 30 for reading from or writing to a removable optical disk 31 such as a CD ROM or other optical media.

The hard disk drive 27, magnetic disk drive 28, and optical disk drive 30 are connected to the system bus 23 by a hard disk drive interface 32, a magnetic disk drive interface 33, and an optical disk drive interface 34, respectively. The drives and their associated computer-readable media provide nonvolatile storage of computer readable instructions, data structures, program modules and other data for the mobile personal computer 20. Although the exemplary environment described herein employs a hard disk 60, a removable magnetic disk 29, and a removable optical disk 31, it will be appreciated by those skilled in the art that other types of computer readable media which can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridges, random access memories, read only memories, and the like may also be used in the exemplary operating environment.

A number of program modules may be stored on the hard disk 60, magnetic disk 29, optical disk 31, ROM 24 or RAM 25, including an operating system 35, one or more application programs 36, other program modules 37, and program data 38. A user may enter commands and information into the mobile personal computer 20 through input devices such as a keyboard 40 and a pointing device 42. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit 21 through a serial port

interface 46 that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, game port or a universal serial bus (USB). A monitor 47 or other type of display device is also connected to the system bus 23 via an interface, such as a video adapter 48. In addition to the monitor, personal computers typically include other
5 peripheral output devices, not shown, such as speakers and printers.

The mobile personal computer 20 may operate in a networked environment using logical connections to one or more remote computers, such as a remote computer 49. The remote computer 49 may be another personal computer, a server, a router, a network PC, a peer device or other common network node, and typically includes many or all of the
10 elements described above relative to the mobile personal computer 20, although only a memory storage device 50 has been illustrated in Figure 1. The logical connections depicted in Figure 1 include a Wireless Local Area Network (WLAN) 51 and a wide area network (WAN) 52. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet.

15 When used in a WLAN networking environment, the mobile personal computer 20 is connected to the local network 51 through a wireless network interface or adapter 53. The wireless interface 53 transmits wireless packets to a base station 61. The base station 61 can then retransmit the packets, either through a wired or wireless network to the remote computer 49. When used in a WAN networking environment, the personal
20 computer 20 typically includes a modem 54 or other means for establishing communications over the WAN 52. The modem 54, which may be internal or external, is connected to the system bus 23 via the serial port interface 46. In a networked environment, program modules depicted relative to the mobile personal computer 20, or

portions thereof, may be stored in the remote memory storage device. It will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers may be used.

In the description that follows, the invention will be described with reference to acts and symbolic representations of operations that are performed by one or more computers, unless indicated otherwise. As such, it will be understood that such acts and operations, which are at times referred to as being computer-executed, include the manipulation by the processing unit of the computer of electrical signals representing data in a structured form. This manipulation transforms the data or maintains it at locations in the memory system of the computer, which reconfigures or otherwise alters the operation of the computer in a manner well understood by those skilled in the art. The data structures where data is maintained are physical locations of the memory that have particular properties defined by the format of the data. However, while the invention is being described in the foregoing context, it is not meant to be limiting as those of skill in the art will appreciate that various of the acts and operation described hereinafter may also be implemented in hardware.

In accordance with the invention, an exemplary WLAN is shown in Figure 2. The base stations 72, 74, and 76 are the same as base station 61 in Figure 1, however, for clarity, each base station has been separately numbered so that each can be referred to individually. Similarly, mobile personal computers 78, 80, and 82 are all of the same type as mobile personal computer 20 described above. With reference to Figure 2, the mobile computer 78 can communicate, via wireless communication, with either base station 72 or base station 74 as shown. In a known manner, the mobile computer 78 can

select the base station which provides the highest signal strength, measured by the signal-to-noise ratio (SNR). The base stations 72, 74, and 76 can be connected by connection 70, which can be either a wired or wireless network. Therefore, to link two computers together, the WLAN passes messages through the base stations. For example, to

5 communicate with mobile computer 80, mobile computer 78 can contact either base station 72 or base station 74. These base stations will then relay the message, through connection 70, to base station 76, which is the base station with which mobile computer 80 may currently be communicating. Base station 76 will then transmit the message to mobile computer 80, completing the wireless connection between mobile computers 78

10 and 80.

Because the mobile computers 78, 80, and 82 can be transported, the WLAN defines a mechanism by which communication between the mobile computers and the WLAN is transferred from one base station to another. The mobile computers 78, 80, and 82 monitor the signal strength of the base stations 72, 74, and 76. In some embodiments

15 the mobile computers continuously monitor the signal strength, and in others, the mobile computers only monitor the signal strength when the SNR of the base station with which the mobile computer is currently communicating falls below an acceptable level.

Similarly, to detect and connect to mobile computers as they are transferred between base stations, the base stations 72, 74, and 76 monitor the signal strength from the mobile

20 computers 78, 80, and 82. A more detailed description of how the mobile computers are passed between base stations can be found in United States Patent No. 5,717,688 entitled WIRELESS LOCAL AREA NETWORK WITH ROAMING INDICATING MULTIPLE

COMMUNICATION RANGES by Belanger et al., the teachings of which are incorporated herein by reference in their entirety.

The present invention uses this monitoring of signal strength by both the base stations and the mobile computers, to locate and track a mobile computer and its user.

5 An exemplary building layout is shown in Figure 3. The building includes hallway 90; offices 92, 93, 94, 95, 96, 97, and 98; and conference rooms 100 and 102. Base stations 72, 74, and 76 have been placed at various locations in the building. The mobile personal computers 78, 80, and 82 are also in the building, although they can move freely throughout the building.

10 The mobile personal computer 78 can monitor the strength of the signal from base stations 72, 74, and 76. As is known by those of skill in the art, the signals of a WLAN are attenuated as they propagate and as they pass through walls. Therefore, as monitored by mobile computer 78, the signal from base station 72 is stronger than the signals from base stations 74 and 76. This is because the signals from base stations 72 and 74 must
15 travel a greater distance and must pass through more walls.

The signal strength from base stations 72, 74, and 76 will vary as the mobile computer 78 is moved around the building. For example, if the user of mobile computer 78 moved the computer into conference room 100, the signal strength of base station 74 as detected by mobile computer 78 would increase, as the distance between base station
20 and mobile computer decreased, and as there would no longer be any walls between them. Similarly, the signal from base station 76, as detected by mobile computer 78, would increase in strength due to the decreased distance and decreased number of intervening walls. However, the signal from base stations 72 would decrease, since mobile computer

78 would move further away. Therefore, it is possible to create a table listing known locations in the building, and the corresponding signal strengths from each of the base stations as received at those locations.

Turning to Figure 4, a method for creating the location versus signal strength table is shown. In Figure 4, diamonds with letters in them indicate locations where empirical measurements of the signal strength of the base stations 72, 74, and 76 have been taken. These measurements can then be compiled into a table, such as Table 1, shown below. Thus, location B has a higher SNR for base station 72 than location A because, while both are approximately equidistant from base station 72, location A is separated from the base station by the wall of office 92. The observation that distance and intervening walls decrease the signal strength, and thus decrease the SNR, is true for the rest of the entries in the table as well.

Location	SNR from Base 72	SNR from Base 74	SNR from Base 76
A	40 dB	20 dB	20 dB
B	45 dB	30 dB	30 dB
C	35 dB	25 dB	25 dB
D	30 dB	30 dB	30 dB
E	40 dB	35 dB	35 dB
F	25 dB	40 dB	30 dB
G	25 dB	45 dB	35 dB
H	20 dB	40 dB	40 dB
I	25 dB	35 dB	40 dB
J	30 dB	30 dB	35 dB

K	35 dB	25 dB	30 dB
L	40 dB	20 dB	40 dB
M	25 dB	30 dB	45 dB

Table 1

The strength of the radio frequency signals measured by the base station 76 or the mobile computer 20 can vary as a function of the orientation of the mobile computer 20 when performing the measurements. More particularly, the orientation of the computer is related to the position of the user, and it is the user's body that can create a significant difference in the detected signal strength. It is therefore necessary that the table used in determining the location of the mobile computer take this effect into account and be able to determine the location regardless of the orientation of the user with respect to the mobile computer. One method for taking this effect into account is to consider multiple orientations of the user's body to minimize the effects of signal attenuation due to the user's body.

The present invention also contemplates multiple measurements at each location to remove the effect of the random variables, such as air currents and radio interference, that can affect signal quality. Because these events are often short lived, multiple samples taken at one location over a period of time will yield different results. To remove the effect of the random variables, the calculated signal strength values over a period of time are averaged. This average value is then used in a table, such as Table 1 above. In such a manner the accuracy of the table, and thus the location determination, is enhanced.

Once a table relating signal strength to the position of the mobile computer 20, such as Table 1, is created, the mobile computer 20 can determine its location by finding

the row of the table which most closely corresponds to the signal strengths detected by the mobile computer. For example, mobile computer 78 might detect a SNR of 38 dB from base station 72, 23 dB from base station 74, and 24 dB from base station 76. By comparing these values to Table 1, the mobile computer 78 determines that it is located at physical position C. This determination can be done in signal space. The signal space is an multi-dimensional space where the number of dimensions is equivalent to the number of base stations' signals which the mobile computer uses to determine its location. In Table 1 above, three base stations' signal strengths are determined at each physical location, so the signal space is a three-dimensional space. As will be known by those skilled in the art, unlike physical space, the signal space is not limited to three dimensions.

Each set of three measured signal strengths from the three base stations can define a point in the signal space. In one realization of this invention, the Euclidean distance between the point defined by the measured signal strengths and the points defined by the empirically derived signal strengths in Table 1 can be calculated. As is known by those of skill in the art, the Euclidean distance is the square root of the sum, over all the dimensions, of the difference between two points in each dimension, squared. In

mathematical terms, the Euclidean distance, d , is defined as: $d = \sqrt{\sum_{i=1}^n (a_i - b_i)^2}$, where a_i is the value for the i th coordinate of point a and b_i is the value of the i th coordinate of point b , and n is a variable equivalent to the number of dimensions in the signal space.

The physical location of the mobile computer 20 is determined to be the same as the location whose corresponding empirically derived signal strengths in the table are the

closest (as defined above) to the measured signal strengths. Thus, for the measured signal strengths of 68 dB, 53 dB, and 54 dB given as an example above, the location of mobile computer 78 would be determined to be location C. This is because the Euclidean distance in signal space between (38,23,24), which are the measured values, and

5 (35,25,25), the stored values at point C, which were determined empirically during system set-up, is less than the Euclidean distance between (38,23,24) and any other point in the table. The mobile computer 20 therefore concludes that it is located at location C. The location of a mobile computer 20 can thus be determined through sensing the signal strength from each of a number of base stations. As is known by those skilled in the art,

10 the Euclidean distance is just one possible distance metric. Other distance metrics such as sum of absolute value differences, or weighted Euclidean are also possible.

Rather than merely comparing the detected values to a single row of the table, the present invention also contemplates finding several rows of the table, each of which contains values similar to those observed. Such a multiple nearest neighbor approach,

15 spatially averages multiple locations at which the empirically determined signal strengths from the base stations are similar to those measured by a mobile computer seeking to determine its location. As will be known by those of skill in the art, spatial averaging involves averaging the individual coordinate values of the locations. Therefore, it is necessary to define a consistent coordinate system, such as using a corner of the building

20 as the origin (0,0). Returning to the example above, the values detected by mobile computer 78, namely 38 dB, 23 dB, and 24 dB, respectively are similar to the entries for a number of rows in addition to row C selected above. Using the multiple nearest neighbor approach, we find rows A and B are also similar to the detected values. These three

“nearest neighbors”: A, B, and C, are spatially averaged to determine the location of mobile computer 78. As will be apparent to one of skill in the art, the multiple nearest neighbor approach can be implemented with any number of “neighbors”.

A variation of the multiple nearest neighbor approach using weighting is also contemplated by the present invention. If one set of signal strength values are very similar to the values detected by the mobile computer 20, it may be that the position corresponding to those values is more accurate than any other position at which an empirical measurement was taken. That does not mean, however, that the multiple nearest neighbor approach cannot improve the accuracy of that position determination.

However, because there exists a position which appears to be near the actual position of the mobile computer, only minor changes to that position should be caused as a result of the multiple nearest neighbor approach. In such a case, a weighted multiple nearest neighbor approach may be appropriate. A weighted multiple nearest neighbor approach multiplies the coordinates of each “neighbor” location by a weighting factor prior to averaging them. If a position appears to be a particularly good match, then the coordinates of that position would be multiplied by a larger weighting factor than the other positions. In such a manner, the weighted multiple nearest neighbor approach would cause less deviation from the perceived best position, yet would provide a minor position adjustment which could result in even greater accuracy.

The present invention also contemplates locating a mobile device by measuring the signal strength from the mobile device as received by several base stations. As will be evident to those skilled in the art, such a method is the inverse of the method described above. Returning to Figure 2, a computer 84 can also be connected to the base stations

72, 74, and 76, through the network 70. Computer 84 can monitor the signal strength from a particular mobile computer 20 as received by the base stations near that mobile computer. Because it is connected to all of the base stations, the computer 84 can also generate the table which relates the position of the mobile computer 20 to the strength of the signal from the mobile computer as received by each of the base stations. Returning to Figure 4, as explained above, empirical data can be gathered by sampling the signal strength from the mobile computer, as it is moved throughout the building. In this case, however, the table generated by computer 84 as a result of the sampling will contain the signal strength of the signal from the mobile computer as detected at each base station, instead of the signal strength of the signal from each base station as detected at the mobile computer. The computer 84 can collect the signal strength information as received by each base station and create a table such as Table 2 below.

Location of User	SNR at Base 72	SNR at Base 74	SNR at Base 76
A	30 dB	10 dB	10 dB
B	35 dB	20 dB	20 dB
C	25 dB	15 dB	15 dB
D	20 dB	20 dB	20 dB
E	30 dB	25 dB	25 dB
F	15 dB	30 dB	20 dB
G	15 dB	35 dB	25 dB
H	10 dB	30 dB	30 dB
I	15 dB	25 dB	30 dB
J	20 dB	20 dB	25 dB

K	25 dB	15 dB	20 dB
L	30 dB	10 dB	30 dB
M	15 dB	20 dB	35 dB

Table 2

As can be seen from a comparison of Table 1 above and Table 2 above, the tables are similar with respect to the relationship between the signal strengths in any one row.

Even though the signal strength measured at the mobile computer 20 and the base station

5 76 are similar in value, there is no requirement that they be so. The two signals travel the same path and encounter the same obstacles which degrade the signal. The only

difference can be the power of the transmitting devices themselves: the base station, since it does not need to conserve power, may be transmitting at a higher power than the

wireless network interface 53 on the mobile computer 20. For example, the Federal

10 Communications Commission (FCC) allows wireless networks to use up to 1 Watt of transmitting power, which can be easily met by the base station. The wireless network interface 53, however, typically transmits in the 50-100 mW range so as to conserve the battery power of the mobile computer 20.

Therefore, as can be seen by comparing Table 1 and Table 2, the signals received
15 by the base stations in Table 2 are weaker than those received by the mobile computer from the base stations in Table 1. However, because the signals in both directions are equally affected by distance and obstacles, the relationship between the signals in a row remains the same. For example, at location A in Table 1 the signal from base station 72 is stronger than the signals from base stations 74 and 76 because of the distance and the
20 obstacles between location A and base stations 74 and 76. This is the same reason that in

Table 2, at location A, the signal from the mobile computer at location A is stronger when detected by base station 72 than when detected by base stations 74 and 76. Because the mobile computer does not transmit its signals with as much power, the SNR is lower in Table 2 than in Table 1.

5 As described above, multiple measurements taken at several different orientations of the mobile computer 20 can be used to eliminate the effect of the user's body on the signal strength when creating a table such as Table 2. Additionally, as described above, taking multiple measurements at each location can improve the accuracy of the values in the table, as it minimizes the effects of random interference and noise.

10 The multiple nearest neighbor method described in detail above can also be used with the data in Table 2. For example, the computer 84 can determine that the strength of the signal from mobile computer 78, as shown in Figure 4, is 28 dB as detected by base station 72, 13 dB as detected by base station 74, and 14 dB as detected by base station 76.

Comparing these values to Table 3, we find locations A, B, and C as the nearest
15 “neighbors” to the values obtained. The nearest neighbors are then spatially averaged to calculate the location of mobile computer 78. As above, the use of the multiple nearest neighbor method requires the use of a consistent coordinate system. Also, a weighted multiple nearest neighbor approach, as described above, can be used with a table such as Table 3.

20 An alternative method to empirically deriving Tables 1 or 2 above, contemplated by the present invention, requires mathematically estimating the attenuation in the signal as due to the distance between the transmitter and the receiver, and the intervening walls. As is known by those skilled in the art, the transmissions in a wireless network conform

to general radio propagation theories. Most notably the signal strength of the transmissions becomes weaker as the distance from the transmitting source increases, and the signal strength of the transmissions decreases when the signals must pass through walls. Research into the field of electromagnetic waves has yielded a number of useful mathematical formulas. For example, it is known that signal strength decreases with distance. It is also known that walls attenuate signals by a determinable factor, known as the Wall Attenuation Factor (WAF). The WAF is dependent on the thickness of the wall, and the materials used in the construction of the wall. The WAF can be determined empirically by placing a receiver on one side of a wall and a transmitter on the other, and detecting the attenuation of the signal through the wall. One method for determining a WAF can be found in the article entitled "914 MHz Path Loss Prediction Models for Indoor Wireless Communications in Multifloored Buildings" by Scott Y. Seidel and Theodor S. Rappaport, which appeared in IEEE Transactions On Antennas and Propagation, Volume 40, Number 2, February 1992, the teachings of which are hereby incorporated by reference.

The signal strength at a particular location can, therefore, be defined as the signal strength as attenuated by distance and walls that the signal had to pass through. In mathematical terms, the formula can be expressed as follows: the signal strength, or

power P , at a given distance d is calculated as
$$P(d) = P(d_0) - 10n \log \left(\frac{d}{d_0} \right) + \begin{cases} nW(WAF) & nW < C \\ C(WAF) & nW \geq C \end{cases} .$$

The first term is the signal strength at a reference distance d_0 . The reference distance can be chosen to be a convenient distance and the signal strength at that distance can be determined empirically. If the reference distance is chosen to be one meter from the emitter itself, then the signal strength may be available from the specifications of the

device, eliminating the need for empirical determination. The second term in the equation provides the attenuation in the signal strength due to the distance between the point at which the signal strength is sought to be calculated, and the reference point at which the signal strength is known. The variable n is the path loss component which indicates the rate at which the signal strength decreases with distance. The second term is subtracted from the first term, and thus, reduces the reference signal strength if the desired point is further from the transmitter than the reference point. The third term in the equation quantifies the attenuation due to the number of walls the signal must pass through. The term nW represents the number of walls and the WAF can be determined empirically, as described above. Thus, the product of the two yields the attenuation due to all of the walls. As explained above, the WAF is a negative number, resulting in a reduction to the calculated signal strength. After a certain number of walls, however, the signal becomes so weak that further degradation is not mathematically significant. This practical limit is C walls, where C can be selected by the user to satisfy that user's accuracy requirements. After C number of walls, therefore, the attenuation factor can simply be expressed as C multiplied by the WAF.

The number of walls between a signal source and the location for which the signal strength is to be calculated can be determined by automated means. For example, in one realization of this invention, the building is divided into non-overlapping but connected rectangular regions, as defined by the walls inside the building. A straight line between the base station 76 and the location of the mobile personal computer 80, indicating the path the signal would take when no walls are present are considered. Cohen-Sutherland Line Clipping Algorithm can then be used to determine the number of walls between the

source and receiver. Line clipping is the deletion of a part of a line segment which lies outside a clip area. Once the line clipping is performed, the remaining line segment lies completely within a clip area. The algorithm divides the region outside of the clipping area into areas with "outcodes". Each digit of the binary outcode represents whether the particular region lies above, below, or to the left or right of a clipping area. As is shown in Figure 5, a four binary digit outcode can be used. The first digit indicates whether the region is above the clipping region 104. For example, regions 118, 120, and 106 are all above region 104, as indicated by the dashed lines, and those regions all have a binary 1 as the value of the first digit. The second digit indicates whether the region is below the clipping region 104. Thus, regions 114, 112, and 110 all have a binary 1 as the value of the second digit since they are below the clipping region 104. Regions 108 and 116 are adjacent to the clipping region and therefore both the first and second binary digits are 0, since adjacent regions are neither above nor below the clipping region. Similarly, the third binary digit indicates whether the region is to the right of the clipping region 104, and the fourth binary digit indicates whether the region is to the left of the clipping region. The clipping region 104 itself has an outcode of 0000 because, by definition, it is neither above, nor below, and neither to the left nor to the right of itself.

Once this subdivision occurs, all lines through the clipping region, such as lines 122 and 124 shown in Figure 5, are divided by the boundaries of the regions described above, as shown at points 126 and 128 for line 122, and points 130 and 132 for line 124. A key feature of the outcodes is that the binary digits which have a value of 1 correspond to boundaries between the regions, which are crossed. For example, line 122 has two endpoints: one in region 0000 and another in region 1001. The significance of outcode

1001 is that the line must intersect the top and left boundaries because the first digit indicates it is above the clipping region and the last digit indicates it is to the left of the clipping region, as described above. Whenever a point on the line changes its outcode value, by definition the line has crossed a boundary. It is possible that this line intersects

5 a number of rectangular regions. For example, the office layout from Figures 3 and 4 can be divided into regions with outcodes as shown in Figure 5. The Cohen-Sutherland Line Clipping Algorithm is described further in Chapter 3.11 of Computer Graphics Principles and Practice, Second Edition by Foley et al., published in 1990, the teachings of which are incorporated herein by reference.

10 Turning to Figure 6, at step 140, the floor schematic is entered into a computer as an input to the Cohen-Sutherland Line Clipping Algorithm. Similarly, at step 142 the locations of the base stations are entered, and at step 144 the locations at which the signal strength is to be calculated are entered. The Cohen-Sutherland Line Clipping Algorithm at step 146 will then determine, as described above, the number of walls between each of

15 the base stations and the locations at which the signal strength is to be calculated. This number is then used in the signal strength equation, given above, at step 148.

In addition to the number of walls, the WAF, empirically derived as described above, is entered at step 150. At step 152, the limiting factor C is selected by the user. The variable n, the rate at which signal strength decreases with distance, is provided at

20 step 154. The reference distance and the signal strength at that reference distance, as described above, are provided in steps 158 and 156 respectively. The signal strength equation given above can then, at step 148, calculate the signal strength at each of the

locations entered in step 144. The output of the signal strength equation is entered into a table, such as Table 1 or Table 2, above, at step 160.

The mathematical estimation can be used to derive both a table containing the values of the signal strength from various base stations as detected by a mobile computer 20 and the values of the signal strength from a mobile computer 20 as detected by various base stations. As would be known by those of skill in the art, the variables in the signal strength equation would be different depending on which method was used. For example, to calculate the signal strength from a base station, as detected by a mobile computer at a particular location, the reference distance should be set close to the base station, or even at one meter from the base station, as described above, and the term n would be the rate at which the signal strength of the base station decreased with distance. Conversely, to calculate the signal strength from a mobile computer 20 at a particular location, as detected by a base station, the reference distance should be set close to the mobile computer, such as one meter away, and the term n would be the rate at which the signal strength of the mobile computer 20 decreased with distance.

The present invention also contemplates providing for environmental factors by environmentally profiling the system. The base stations are all located at known locations, as shown in Figures 3 and 4. One base station could send out a signal to be received by the other base stations, in the same way that the base stations would receive a signal from a mobile computer. For example, with reference to Figure 3, base station 72 could emit a signal to be detected by base stations 74 and 76. Using a table generated by the signal strength equation given above, the computer 84 could receive the signal of base station 72, as detected by base stations 74 and 76, and determine the location of base

station 72. This would be done in the same manner that computer 84 would determine the location of a mobile computer 20 from its signal strength as detected at the base stations, as described above.

The computer 84 can then compare the calculated location to the known location
5 of base station 72. If there is a difference between the two, the inputs to the variables in the signal strength equation, given above for estimating the signal strength at a particular location, can be varied. For example, the n value, or the WAF, could be changed, and a new table recalculated. This new table would then be used by computer 84 to calculate again the position of base station 72. The computer 84 could then again compare the new
10 calculated location of base station 72 to the known location and determine the difference. The above iteration can be performed multiple times. The computer 84 could determine which values of the variables in the signal strength equation yielded the most accurate results, and then use those values to generate the table, which would, in turn, be used to calculate the position of the mobile computers. The values of the variables could also be
15 passed to the mobile computer 20 along with a map of the building, so that it can generate a table within itself, and determine its location based on the strength of the signal from various base stations, as described above. As would be known by those of skill in the art, the variables in the signal strength equation could be varied beforehand, generating numerous tables. The above method could then be used to select the most
20 accurate table of the group generated. In either case, the environmentally profiled tables could result in more accurate calculations. Because factors which affect signal strength, such as the number of people present, can vary, the system can be programmed to profile and tune itself, as described above, multiple times.

An alternative environmental profiling mechanism can be implemented by empirically deriving more than once the table relating the position of the mobile computer to the signal strength. As described above, a table relating the position of the mobile computer to the signal strength, such as Tables 1 or 3, can be derived empirically. Such empirical derivations can be performed numerous times, under different environmental conditions, and at different times of the day. Environmental conditions can be impacted by the temperature, the number of people in the building, the amount of human traffic in the building, and whether it is day or night. Then, as above, the base stations could test the system by attempting to use the tables to determine the location of a given base station and then comparing the calculated location to the true location. The table that results in the greatest accuracy would then be used. In this way, the system could avoid the complexity of calculating the signal strength. As above, the system could be programmed to environmentally profile itself periodically.

As can be seen from the foregoing detailed description, the present invention is directed to a system and a method for determining the location of a mobile computer and its user based on the strength of wireless signals from the WLAN to which the computer is connected. The present invention can also be implemented by a dedicated system providing base stations and receiver/transmitters on the mobile computer. Similarly, the present invention can operate on any wireless mechanism, which does not require a line-of-site between the receiver and transmitter, such as radio frequency (RF) transmissions of varying wavelengths and ultra-sound transmissions. The present invention is equally applicable to a wireless system that interconnects other mobile units, in addition to

mobile personal computer 20, such as cordless phones, CB radios, two-way radios, or the like.

All of the references cited herein, including patents, patent applications, and publications, are hereby incorporated by reference in their entireties.

5 In view of the many possible embodiments to which the principles of this invention may be applied, it should be recognized that the embodiment described herein with respect to the drawing figures is meant to be illustrative only and should not be taken as limiting the scope of invention. For example, those of skill in the art will recognize that the elements of the illustrated embodiment shown in software may be implemented
10 in hardware and vice versa or that the illustrated embodiment can be modified in arrangement and detail without departing from the spirit of the invention. Therefore, the invention as described herein contemplates all such embodiments as may come within the scope of the following claims and equivalents thereof.

CLAIMS**We claim:**

1. A method for determining a location of a mobile unit, comprising:
measuring a wireless signal strength; comparing the measured wireless signal strength to
5 a table of wireless signal strengths and known locations of the mobile unit; finding a table
entry whose wireless signal strength is closest, by distance in signal space, to the
measured wireless signal strength; and, determining the location of the mobile unit with
reference to the found table entry.
- 10 2. The method of claim 1 wherein the determining the location of the mobile
unit with reference to the found table entry includes determining the location of the
mobile unit to be proximate to a known location corresponding to the found table entry.
- 15 3. The method of claim 1 wherein the finding the table entry whose wireless
signal strength is most similar to the measured wireless signal strength includes finding a
plurality of table entries and wherein the determining the location of the mobile unit with
reference to the found table entry includes determining the location of the mobile unit to
be proximate to a spatial average of known locations corresponding to the found plurality
of table entries.
- 20 4. The method of claim 3 wherein the determining the location of the mobile
unit to be proximate to a spatial average of known locations corresponding to the found

plurality of table entries includes multiplying each known location by a weighting factor prior to the spatial averaging of the known locations.

5. The method of claim 1 wherein measuring the wireless signal strength
5 includes measuring, at the mobile unit, a wireless signal strength of a base station, and wherein the table of wireless signal strengths and known locations of the mobile unit includes the wireless signal strength of the base station.

6. The method of claim 5 wherein the table of wireless signal strengths and
10 known locations of the mobile unit is generated by a method comprising the steps of: measuring, at the mobile unit in a known location, the wireless signal strength of the base station; and entering, as an entry in the table, the known location and the measured wireless signal strength of the base station.

7. The method of claim 6 wherein the measuring of the wireless signal
15 strength of the base station includes measuring, at the mobile unit in the known location, the wireless signal strength of the base station in a plurality of orientations of the mobile unit.

8. The method of claim 5 wherein the table of wireless signal strengths and
20 known locations of the mobile unit is generated by a method comprising the steps of: mathematically estimating, at the mobile unit in a known location, the wireless signal

strength of the base station; and entering, as an entry in the table, the known location and the mathematically estimated wireless signal strength of the base station.

9. The method of claim 8 wherein the mathematically estimating, at the
5 mobile unit in the known location, the wireless signal strength of the base station includes determining a reference wireless signal strength of the base station at a reference distance from the base station.

10. The method of claim 8 wherein the mathematically estimating, at the
10 mobile unit in the known location, the wireless signal strength of the base station includes determining a distance between the base station and the known location.

11. The method of claim 8 wherein the mathematically estimating, at the
mobile unit in the known location, the wireless signal strength of the base station includes
15 determining an existing number of walls between the base station and the known location and determining a wall attenuation factor.

12. The method of claim 11 wherein the determining the existing number of
walls between the base station and the known location includes using a line clipping
20 algorithm.

13. The method of claim 11 wherein the determining the existing number of walls between the base station and the known location includes determining a practical limit number of walls between the base station and the known location.

5 14. The method of claim 1 wherein measuring the wireless signal strength includes measuring, at a base station, a wireless signal strength of the mobile unit, and wherein the table of wireless signal strengths and known locations of the mobile unit includes the wireless signal strength of the mobile unit.

10 15. The method of claim 14 wherein the table of wireless signal strengths and known locations of the mobile unit is generated by a method comprising the steps of: measuring, at the base station, the wireless signal strength of the mobile unit in a known location; and entering, as an entry in the table, the known location and the measured wireless signal strength of the mobile unit in the known location.

15 16. The method of claim 15 wherein the measuring of the wireless signal strength of the mobile unit in the known location includes measuring, at the base station, the wireless signal strength of the mobile unit in a plurality of orientations at the known location.

20 17. The method of claim 14 wherein the table of wireless signal strengths and known locations of the mobile unit is generated by a method comprising the steps of: mathematically estimating, at the base station, the wireless signal strength of the mobile

unit in a known location; and entering, as an entry in the table, the known location and the mathematically estimated wireless signal strength of the mobile unit in the known location.

5 18. The method of claim 17 wherein the mathematically estimating, at the base station, the wireless signal strength of the mobile unit in the known location includes determining a reference wireless signal strength of the mobile unit in the known location at a reference distance from the mobile unit in the known location.

10 19. The method of claim 17 wherein the mathematically estimating, at the base station, the wireless signal strength of the mobile unit in the known location includes determining a distance between the base station and the known location.

15 20. The method of claim 17 wherein the mathematically estimating, at the base station, the wireless signal strength of the mobile unit in the known location includes determining an existing number of walls between the base station and the known location and determining a wall attenuation factor.

20 21. The method of claim 20 wherein the determining the existing number of walls between the base station and the known location includes using a line clipping algorithm.

22. The method of claim 20 wherein the determining the existing number of walls between the base station and the known location includes determining a practical limit number of walls between the base station and the known location.

5 23. A computer-readable medium having computer-executable instructions for performing steps, comprising: measuring a wireless signal strength; comparing the measured wireless signal strength to a table of wireless signal strengths and known locations of the mobile unit; finding a table entry whose wireless signal strength is closest, by distance in signal space, to the measured wireless signal strength; and,
10 determining the location of the mobile unit with reference to the found table entry.

24. The computer-readable medium of claim 23 wherein the determining the location of the mobile unit with reference to the found table entry includes determining the location of the mobile unit to be proximate to a known location corresponding to the
15 found table entry.

25. The computer-readable medium of claim 23 wherein the finding the table entry whose wireless signal strength is most similar to the measured wireless signal strength includes finding a plurality of table entries and wherein the determining the
20 location of the mobile unit with reference to the found table entry includes determining the location of the mobile unit to be proximate to a spatial average of known locations corresponding to the found plurality of table entries.

26. The computer-readable medium of claim 25 wherein the determining the location of the mobile unit to be proximate to a spatial average of known locations corresponding to the found plurality of table entries includes multiplying each known location by a weighting factor prior to the spatial averaging of the known locations.

5

27. The computer-readable medium of claim 23 wherein measuring the wireless signal strength includes measuring, at the mobile unit, a wireless signal strength of a base station, and wherein the table of wireless signal strengths and known locations of the mobile unit includes the wireless signal strength of the base station.

10

28. The computer-readable medium of claim 27 wherein the table of wireless signal strengths and known locations of the mobile unit is generated by computer-executable instructions for performing steps, comprising: measuring, at the mobile unit in a known location, the wireless signal strength of the base station; and entering, as an entry in the table, the known location and the measured wireless signal strength of the base station.

15

29. The computer-readable medium of claim 28 wherein the measuring of the wireless signal strength of the base station includes measuring, at the mobile unit in the known location, the wireless signal strength of the base station in a plurality of orientations of the mobile unit.

20

30. The computer-readable medium of claim 27 wherein the table of wireless signal strengths and known locations of the mobile unit is generated by computer-executable instructions for performing steps, comprising: mathematically estimating, at the mobile unit in a known location, the wireless signal strength of the base station; and
5 entering, as an entry in the table, the known location and the mathematically estimated wireless signal strength of the base station.

31. The computer-readable medium of claim 30 wherein the mathematically estimating, at the mobile unit in the known location, the wireless signal strength of the
10 base station includes determining a reference wireless signal strength of the base station at a reference distance from the base station.

32. The computer-readable medium of claim 30 wherein the mathematically estimating, at the mobile unit in the known location, the wireless signal strength of the
15 base station includes determining a distance between the base station and the known location.

33. The computer-readable medium of claim 30 wherein the mathematically estimating, at the mobile unit in the known location, the wireless signal strength of the
20 base station includes determining an existing number of walls between the base station and the known location and determining a wall attenuation factor.

34. The computer-readable medium of claim 33 wherein the determining the existing number of walls between the base station and the known location includes using a line clipping algorithm.

5 35. The computer-readable medium of claim 33 wherein the determining the existing number of walls between the base station and the known location includes determining a practical limit number of walls between the base station and the known location.

10 36. The computer-readable medium of claim 23 wherein measuring the wireless signal strength includes measuring, at a base station, a wireless signal strength of the mobile unit, and wherein the table of wireless signal strengths and known locations of the mobile unit includes the wireless signal strength of the mobile unit.

15 37. The computer-readable medium of claim 36 wherein the table of wireless signal strengths and known locations of the mobile unit is generated by computer-executable instructions for performing steps, comprising: measuring, at the base station, the wireless signal strength of the mobile unit in a known location; and entering, as an entry in the table, the known location and the measured wireless signal strength of the
20 mobile unit in the known location.

38. The computer-readable medium of claim 37 wherein the measuring of the wireless signal strength of the mobile unit in the known location includes measuring, at

the base station, the wireless signal strength of the mobile unit in a plurality of orientations at the known location.

39. The computer-readable medium of claim 36 wherein the table of wireless
5 signal strengths and known locations of the mobile unit is generated by computer-executable instructions for performing steps, comprising: mathematically estimating, at the base station, the wireless signal strength of the mobile unit in a known location; and entering, as an entry in the table, the known location and the mathematically estimated wireless signal strength of the mobile unit in the known location.

10 40. The computer-readable medium of claim 39 wherein the mathematically estimating, at the base station, the wireless signal strength of the mobile unit in the known location includes determining a reference wireless signal strength of the mobile unit in the known location at a reference distance from the mobile unit in the known location.

15 41. The computer-readable medium of claim 39 wherein the mathematically estimating, at the base station, the wireless signal strength of the mobile unit in the known location includes determining a distance between the base station and the known location.

20 42. The computer-readable medium of claim 39 wherein the mathematically estimating, at the base station, the wireless signal strength of the mobile unit in the known location includes determining an existing number of walls between the base station and the known location and determining a wall attenuation factor.

43. The computer-readable medium of claim 42 wherein the determining the existing number of walls between the base station and the known location includes using a line clipping algorithm.

5

44. The computer-readable medium of claim 42 wherein the determining the existing number of walls between the base station and the known location includes determining a practical limit number of walls between the base station and the known location.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
22

ABSTRACT OF THE INVENTION

A method for locating a user in a wireless network is disclosed. A mobile computer seeking to determine its location within a building detects the signal strength of one or more wireless base stations placed at known locations throughout the building.

- 5 The mobile computer uses this measured signal strength to determine its location via a signal-strength-to-location table look-up. A table of known locations within the building and the base station signal strength at those locations is searched to find the most similar stored signal strength to the signal strength detected. The location corresponding to the most similar stored signal strength is determined to be the current location of the mobile
- 10 computer. Alternatively, a number of signal strengths from the table can be used and the corresponding locations can be spatially averaged to determine the location of the mobile computer. The table can be derived empirically, by placing a mobile computer at the known locations and detecting the signal strength of the wireless base stations at those locations, or the table can be derived mathematically by taking into account a reference
- 15 signal strength, the distance between the reference point and the known location, and the number of walls between the reference point and the known location. As an alternative, the base stations can detect the signal strength of the mobile computer. In such a case, the table would relate a known position of the mobile computer to the signal strength of the mobile computer at that location as detected by the one or more base stations.

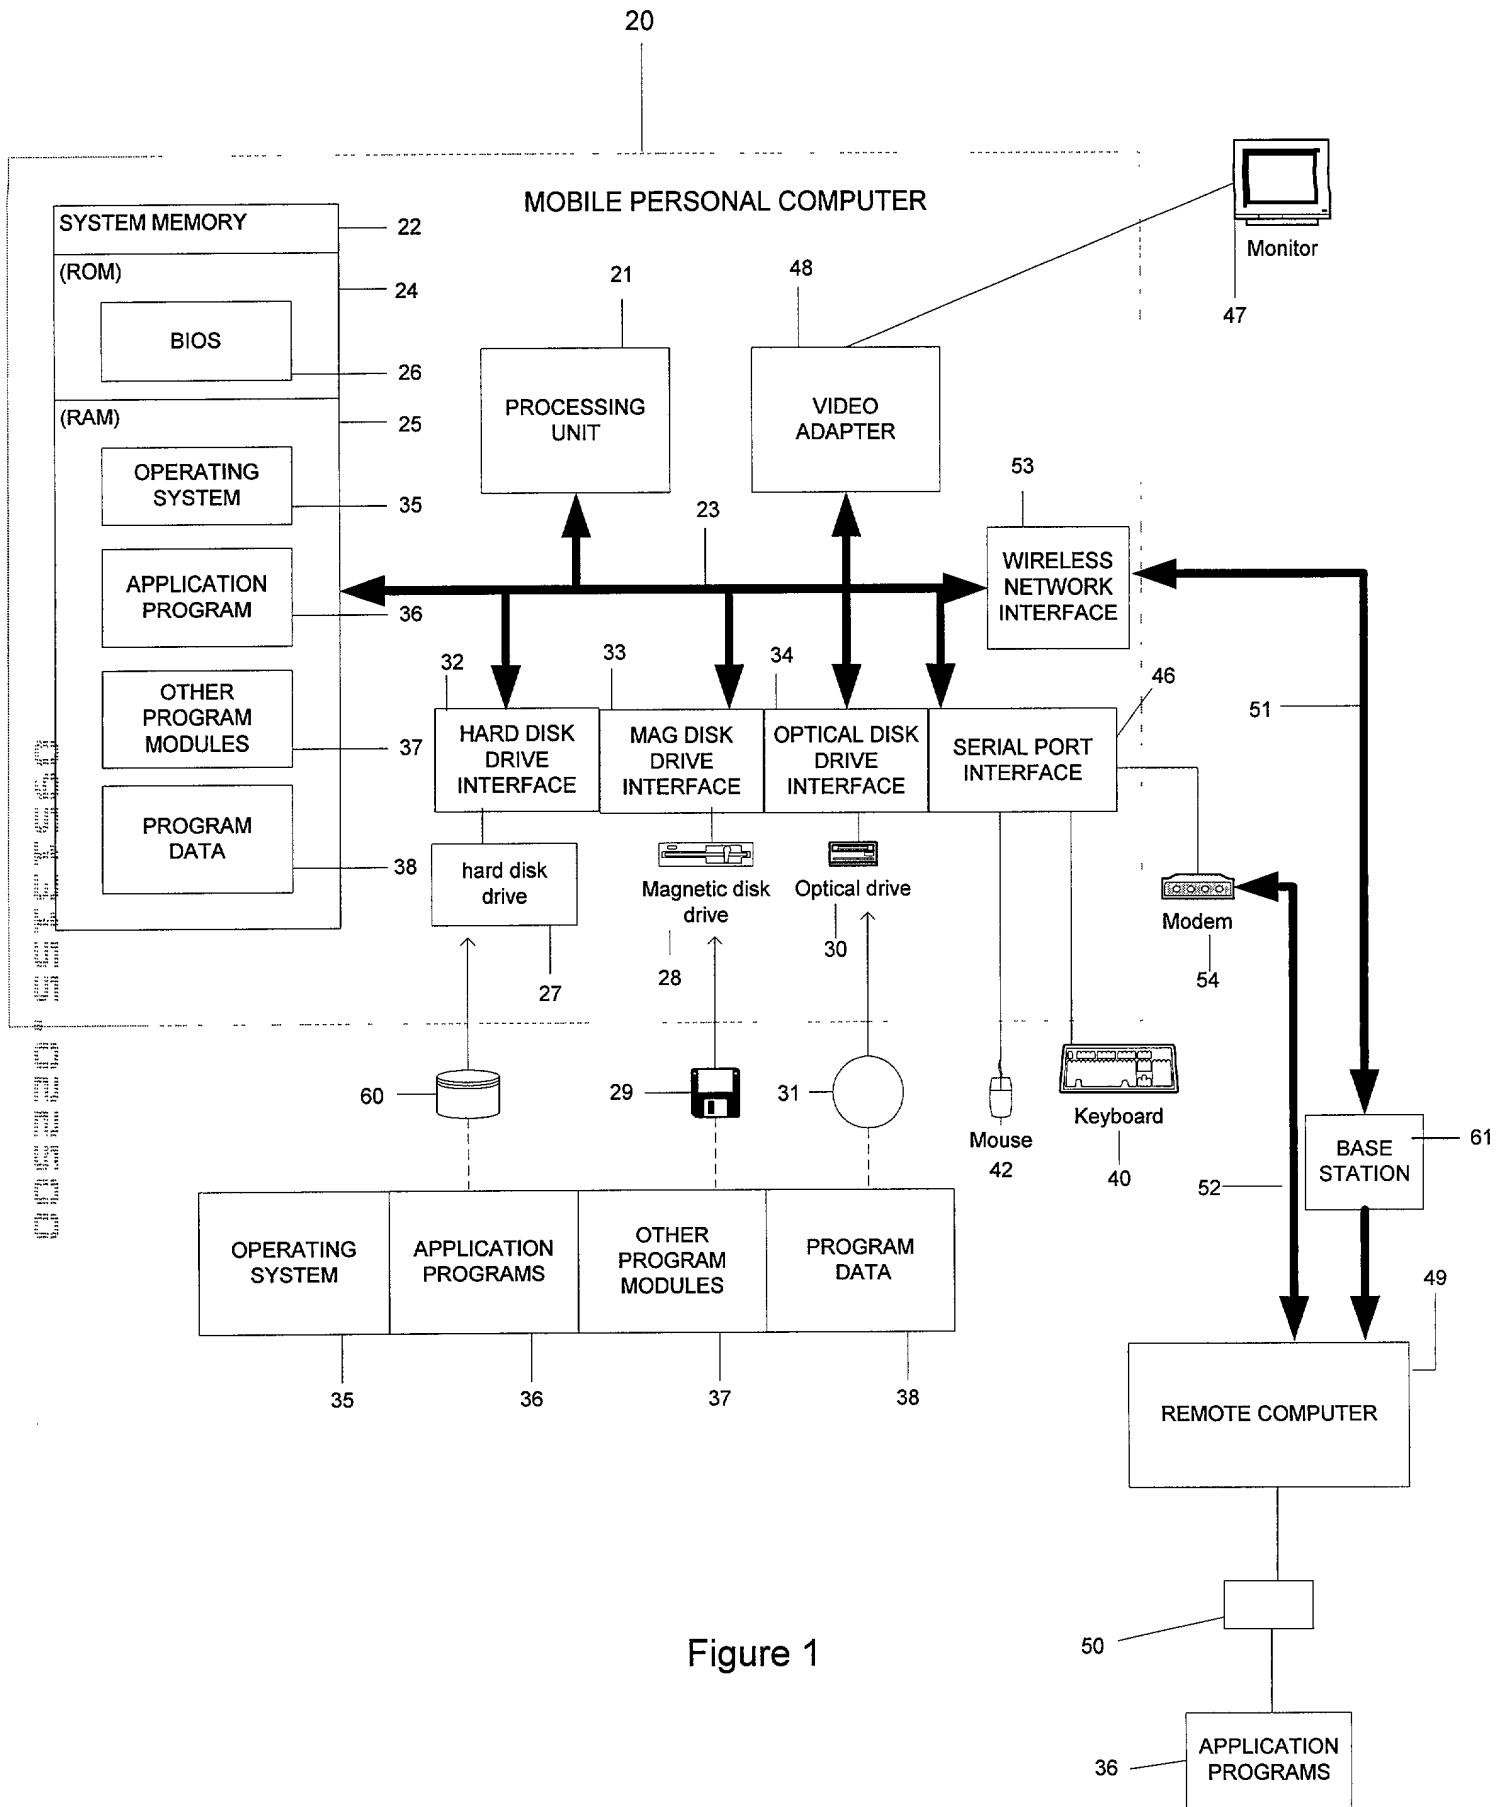


Figure 1

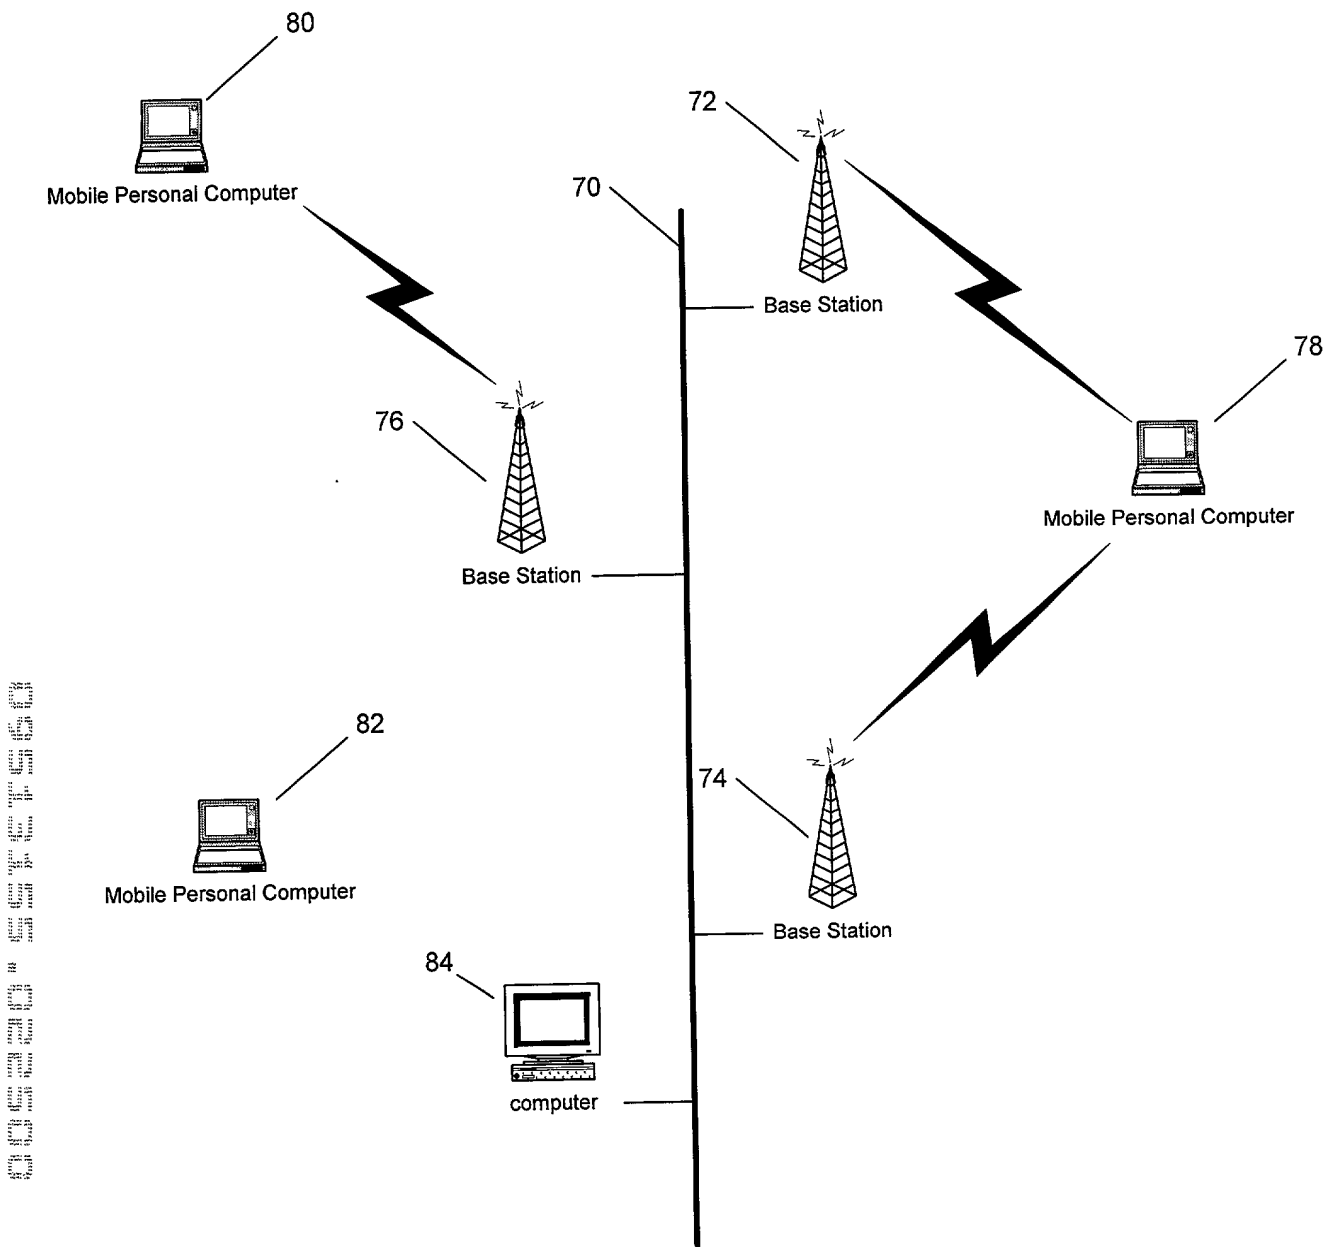


Figure 2

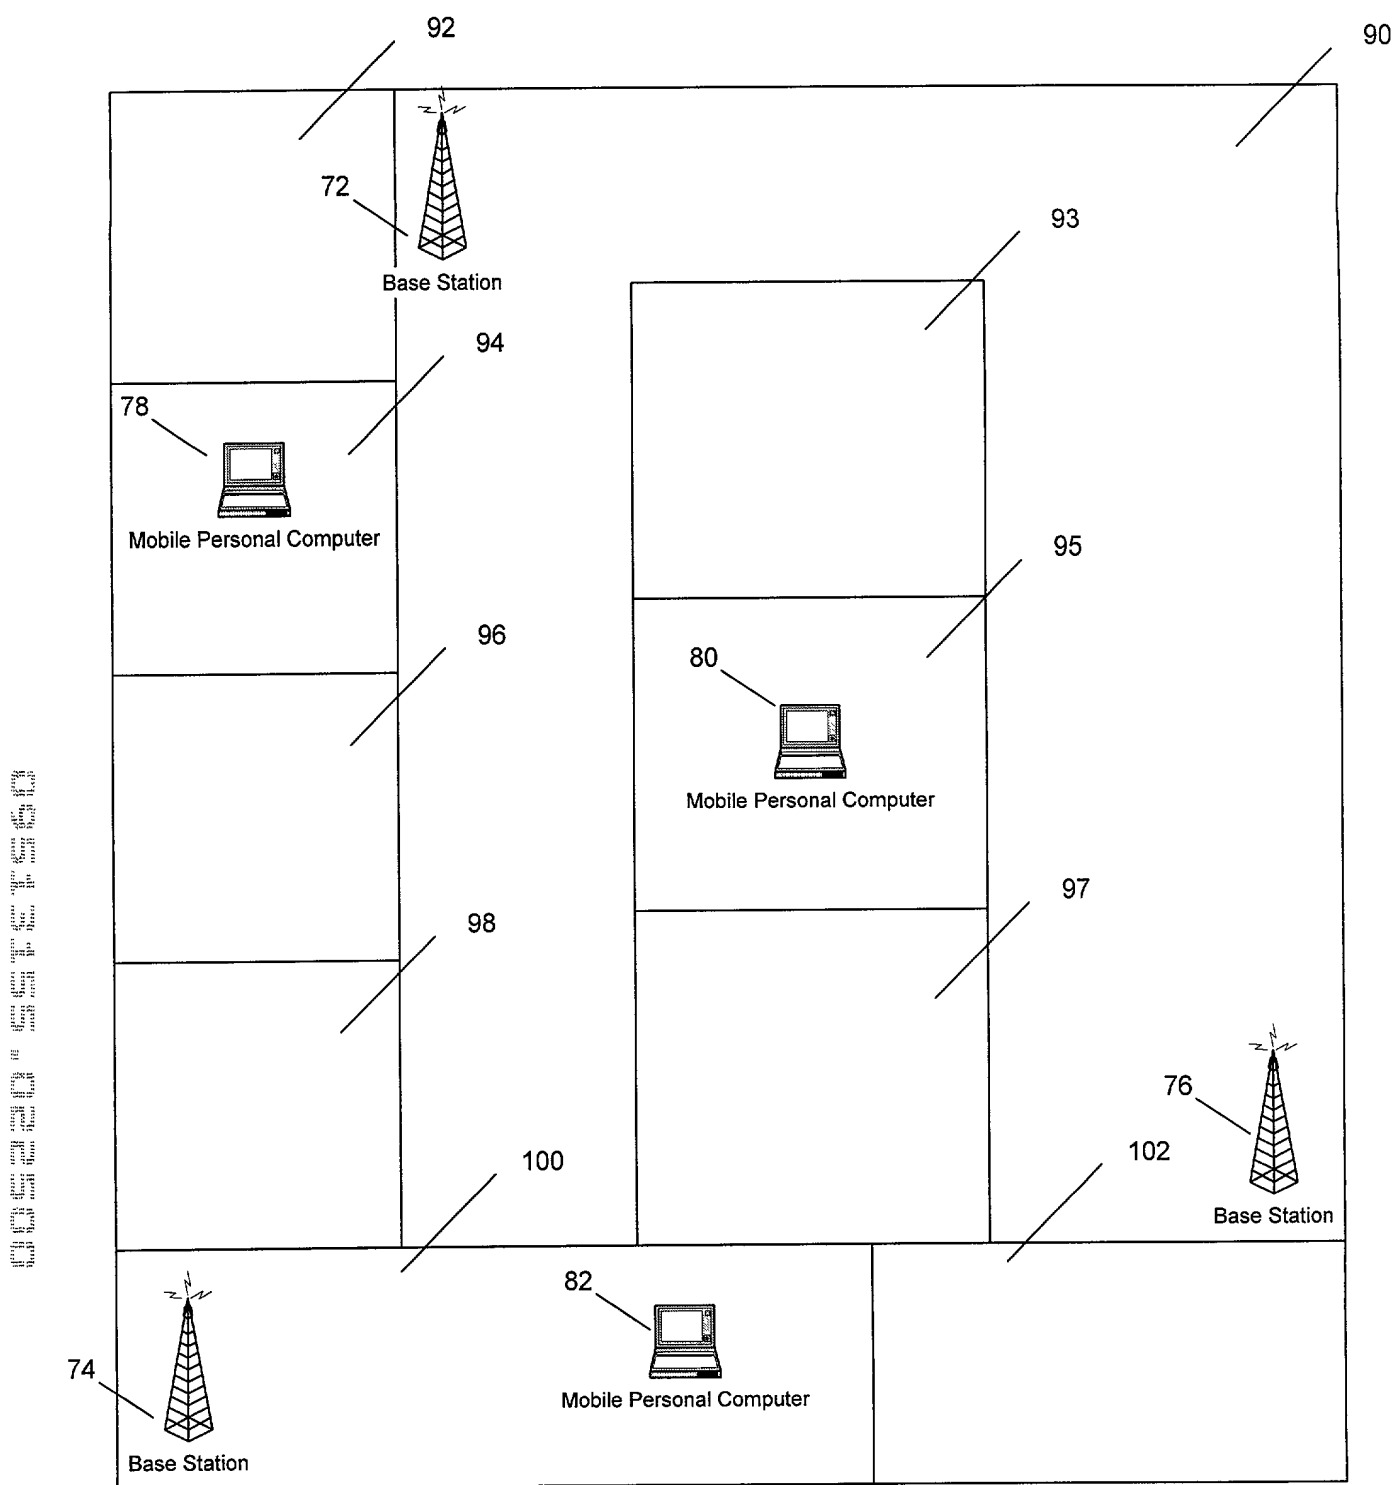


Figure 3

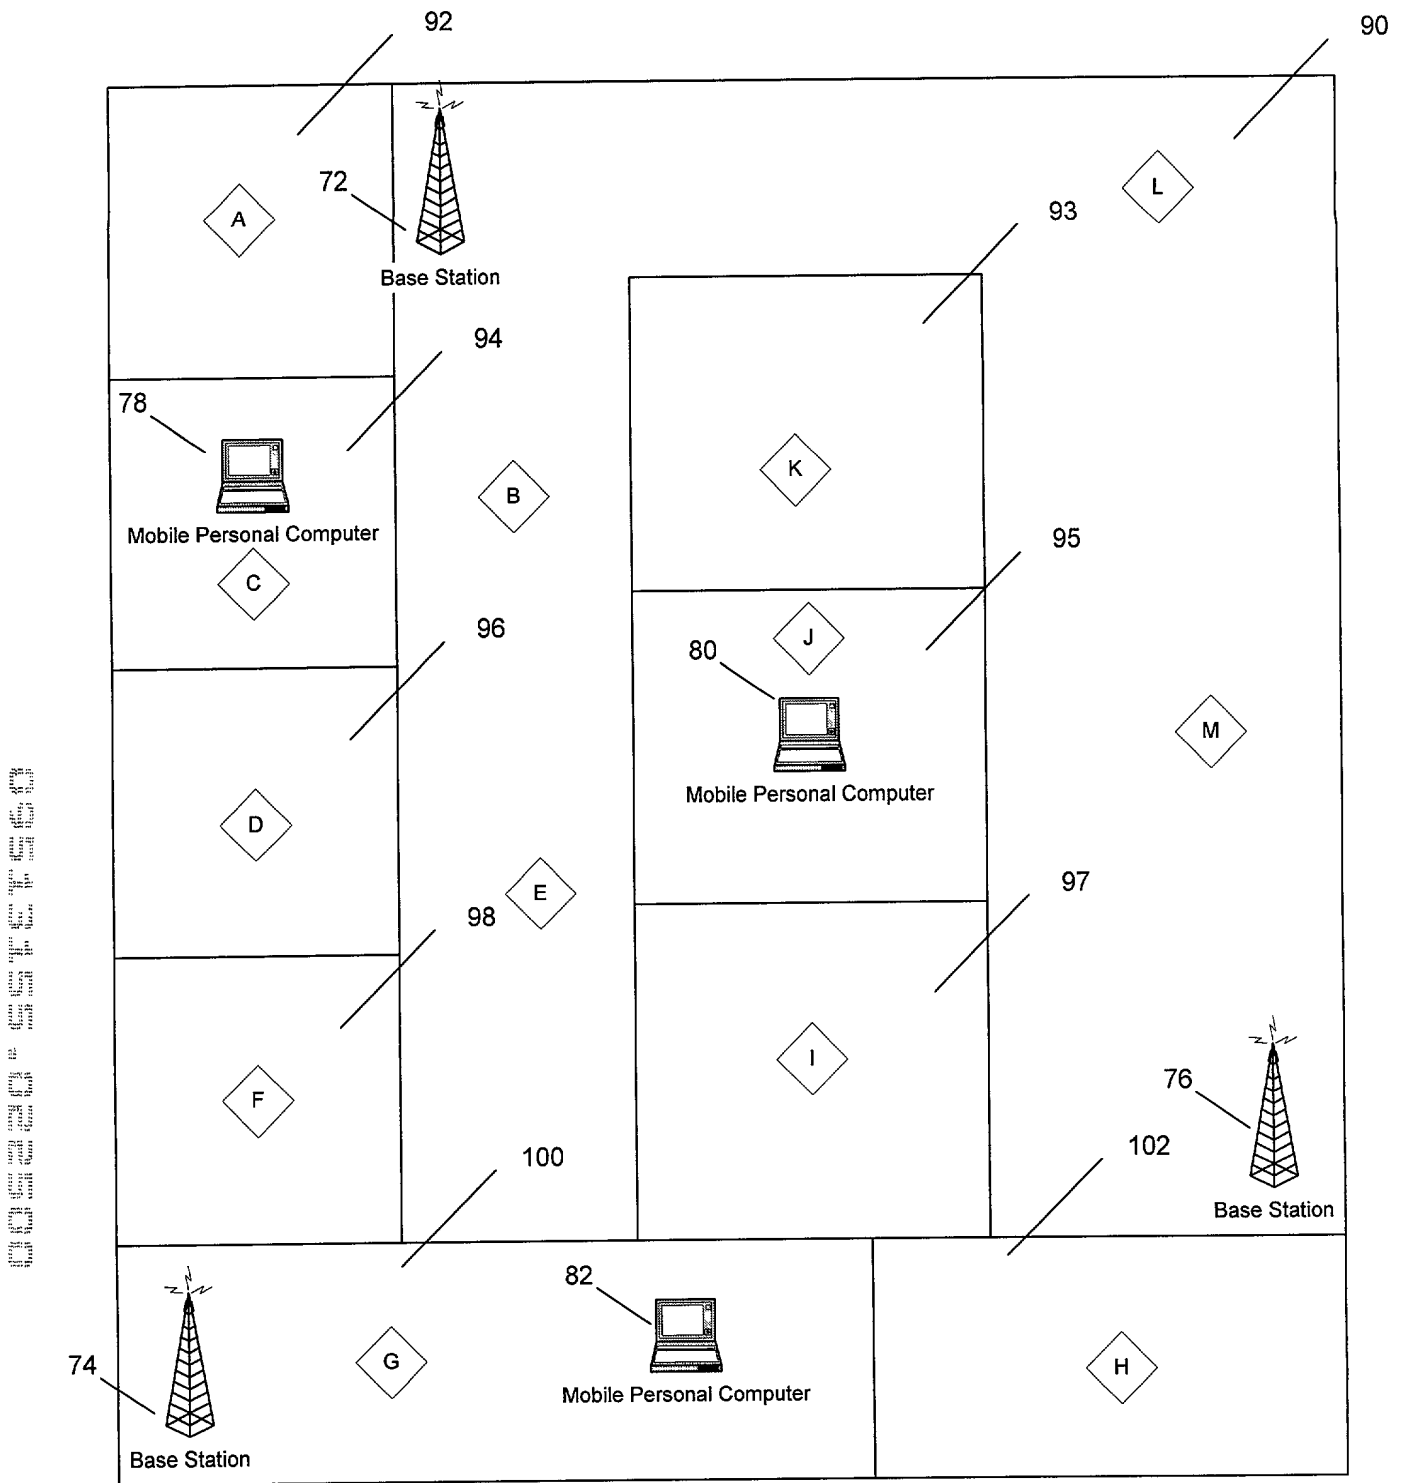


Figure 4

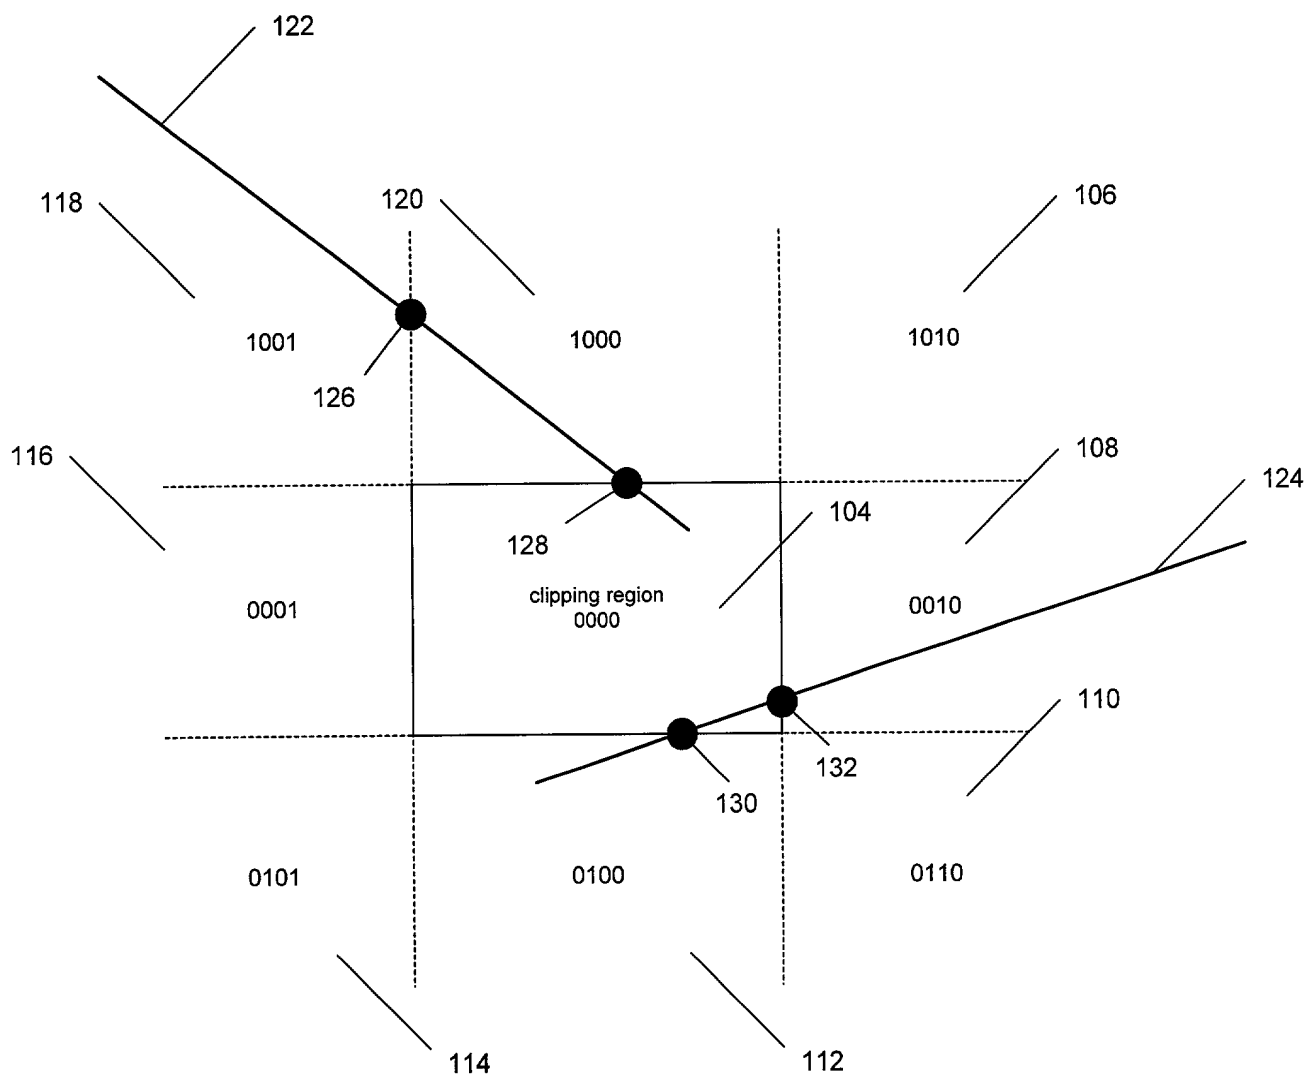


Figure 5

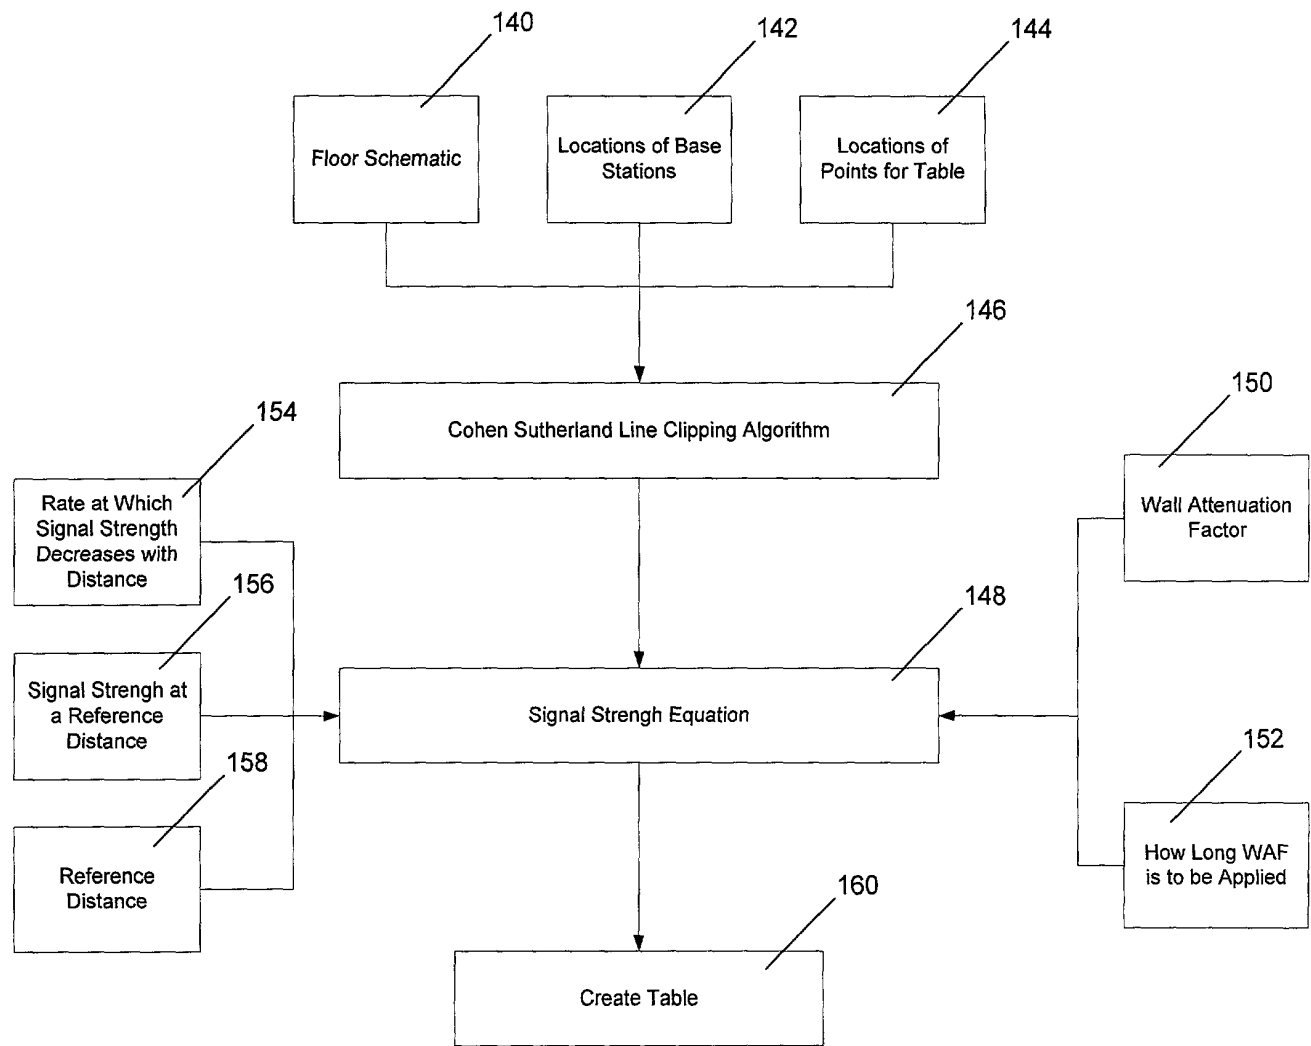


Figure 6

COMBINED DECLARATION AND POWER OF ATTORNEY

As below named inventor, I hereby declare that

This declaration is of the following type:

- ☒ original ☐ design ☐ supplemental
☐ national stage of PCT
☐ divisional ☐ continuation ☐ continuation-in-part

My residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first, and sole inventor (*if only one name is listed below*) or an original, first, and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

USING A DERIVED TABLE OF SIGNAL STRENGTH DATA TO LOCATE AND TRACK
A USER IN A WIRELESS NETWORK

the specification of which:

- ☒ is attached hereto.
☐ was filed on _____ as Serial No. _____ and was amended on _____. (*if applicable*).
☐ was filed by Express Mail No. _____ as Serial No. not known yet, and was amended on _____ (*if applicable*).
☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____ (*if any*).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

COUNTRY	APPLICATION	DATE OF FILING (day,month,year)	PRIORITY CLAIMED UNDER 35 USC 119		
			YES		NO
			YES		NO
			YES		NO

I hereby claim the benefit pursuant to Title 35, United States Code, § 119(e) of the following United States provisional application(s):

PRIOR U.S. PROVISIONAL APPLICATIONS CLAIMING THE BENEFIT UNDER 35 USC 119(e)	
APPLICATION NO.	DATE OF FILING
60/121,612	February 25, 1999

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 USC 120					
U.S. APPLICATIONS			Status (check one)		
U.S. APPLICATIONS	U.S. FILING DATE		PATENTED	PENDING	ABANDONED
1. 0 /					
2. 0 /					
3. 0 /					
PCT APPLICATIONS DESIGNATING THE U.S.			Status (check one)		
PCT APPLICATION No.	PCT FILING DATE	U.S. SERIAL NOS. ASSIGNED (if any)	PATENTED	PENDING	ABANDONED
4.					
5.					
6.					

DETAILS OF FOREIGN APPLICATIONS FROM WHICH PRIORITY CLAIMED UNDER 35 USC 119 FOR ABOVE LISTED U.S./PCT APPLICATIONS				
ABOVE APPLN. NO.	COUNTRY	APPLICATION NO.	DATE OF FILING (day,month,yr)	DATE OF ISSUE (day,month,yr)
1.				
2.				
3.				
4.				

As a named inventor, I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Berton Scott Sheppard, Reg. 20922
James B. Muskal, Reg. 22797
Dennis R. Schlemmer, Reg. 24703
Gordon R. Coons, Reg. 20821
John E. Rosenquist, Reg. 26356
John W. Kozak, Reg. 25117
Charles S. Oslakovic, Reg. 27583
Mark E. Phelps, Reg. 28461
H. Michael Hartmann, Reg. 28423
Bruce M. Gagala, Reg. 28844
Charles H. Mottier, Reg. 30874
John Kilyk, Jr., Reg. 30763
Robert F. Green, Reg. 27555
John B. Conklin, Reg. 30369
James D. Zalewa, Reg. 27848
John M. Belz, Reg. 30359
Brett A. Hesterberg, Reg. 31837
Jeffrey A. Wyand, Reg. 29458

Paul J. Korniczky, Reg. 32849
Pamela J. Ruschau, Reg. 34242
Steven P. Petersen, Reg. 32927
John M. Augustyn, Reg. 33589
Christopher T. Griffith, Reg. 33392
Wesley O. Mueller, Reg. 33976
Jeremy M. Jay, Reg. 33587
Jeffrey B. Burgan, Reg. 35463
Eley O. Thompson, Reg. 36035
Mark Joy, Reg. 35562
Allen E. Hoover, Reg. 37354
David M. Airan, Reg. 38811
Xavier Pillai, Reg. 39799
Y. Kurt Chang, Reg. 41397
Gregory C. Bays, Reg. 40505
Carol Larcher, Reg. 35243
Steven H. Sklar, Reg. 42154
M. Daniel Hefner, Reg. 41826


Thomas A. Belush, Reg. 37090
Kenneth P. Spina, Reg. 43927
Gary R. Jarosik, Reg. 35906
Song Zhu, Reg. 44420
Andrew J. Heinisch, Reg. 43666
Jeffery J. Makeever, Reg. 37390
Salim A. Hasan, Reg. 38175
Richard A. Wulff, Reg. 42238
Jamison E. Lynch, Reg. 41168
Vladan M. Vasiljevic, Reg. 45177
Rattan Nath, Reg. 43827
Robert M. Gould, Reg. 43642
Len Smith, Reg. 43139
Kevin L. Wingate, Reg. 38662
David J. Schodin, Reg. 41294
Paul L. Ahern, Reg. 17020
Theodore W. Anderson, Reg. 17035
Noel I. Smith, Reg. 18698
Katie E. Sake, Reg. 32628
Daniel D. Crouse, Reg. 32022

I further direct that correspondence concerning this application be directed to LEYDIG, VOIT & MAYER, LTD., Two Prudential Plaza, Suite 4900, 180 North Stetson, Chicago, Illinois 60601-6780, Telephone (312) 616-5600.

I hereby declare that all statements made herein of my own knowledge are true, that all statements made on information and belief are believed to be true, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Paramvir Bahl

Inventor's signature



Date

2/24/00


Country of Citizenship: U.S.A.

Residence: 2221 271st Court SE, Issaquah, Washington, 98029

Post Office Address: Same as above

Full name of second joint inventor, if any: Venkata N. Padmanabhan

Inventor's signature



Date

FEB 24, 2000

Country of Citizenship: India

Residence: 14616 NE 36th Street, #E-16, Bellevue, Washington 98007

Post Office Address: Same as above